

CREATIVO®

MONO



STEP BY STEP GUIDE

CREATIVO MONO

The One-Component Microcement System for Smart Interiors

CREATIVO MONO is the ideal solution for those seeking the aesthetic impact of a continuous decorative surface with a simplified application process.

It's a ready-to-use, one-component microcement system designed to offer maximum versatility, speed, and ease of use – without compromising on quality.





Whether for walls or floors, residential or commercial interiors, CREATIVO MONO ensures a seamless, elegant finish with excellent resistance and a natural, contemporary look.



CREATIVO MONO


The One-Component Microcement System for Smart Interiors

FEATURES:

- One-Component System → No mixing with hardeners, just open and apply.
-  Quick Application → Reduced drying times and simplified steps
-  Unlimited Colors & Textures → Custom aesthetic results
-  Perfect for Indoor Use → Walls, furniture, low-traffic floors
-  Made in Italy → Design meets performance



CREATIVO MONO

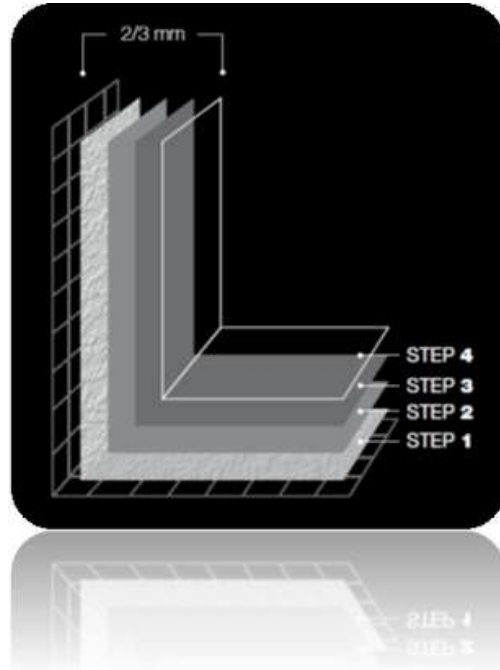

THE SYSTEM

STEP 1:



CREATIVO MONO FONDO

in 2 coats Ready to use Waiting time: 8 h

Consumption rate: 0.7 - 1 kg/sqm per coat



STEP 2:



CREATIVO MONO FINITURA

in 2 coats Ready to use Waiting time: 4 h

Consumption rate: 0.4 - 0.5 kg/sqm per coat



STEP 3:



CREATIVO PRIMER

in 1 coat Ready to use Waiting time: 4-6 h

Coverage: 12.5 sqm/l per coat



STEP 4:



CREATIVO TOP A + B

in 2-3 coats Mixing ratio: 5:1 Waiting time: 6 h (max 24h)

Coverage: 14 sqm/l per coat



OR



CREATIVO MONO TOP

in 2-3 coats Ready to use Waiting time: 6 h (max 24h)

Coverage: 11-14 sqm/l per coat



SURFACE PREPARATION

01

Surfaces need to be compact, sound, dry, clean and free from dust, grease, oil, etc. Old paint, if non-adherent or loose, must be removed.

Pay particular attention to residual oil and waxes in the joints between ceramic tiles.

02

In case the substrate is not solid, sound and compact, a consolidating coat of **CREATIVO PRIMER** should be applied. In case of exterior dusty and not solid substrates, consolidate with **RESINPOL** (solvent-based).

03

CREATIVO is a 2-3 mm system, in case of higher unevenness and/or different substrates, it is necessary to flatten the surface with **CREATIVO AUTOLIVELLANTE**, quick-drying self-levelling mortar.

04

In the basement, on ground floors, or wherever there's the risk of rising damp (above 4%) apply **CREATIVO BARRIERA** moisture barrier.

05

Control joints need to stay free to absorb any structural movement. Mark them in order to replicate them in the microcement system.

06

On particularly glossy and smooth surface perform shotblasting or scarification of the surface and apply 1 coat of **CREATIVO GRIP**



SYSTEM APPLICATION

STEP 1: CREATIVO MONO FONDO

1° COAT



Mix **CREATIVO MONO FONDO** and apply by stainless steel trowel

Apply it in a thin layer.

In case of grout joints deeper or wider than 3 mm or on large surfaces, we recommend to embed a 90 g/m² fiberglass mesh in the first fresh coat of **CREATIVO FONDO**.

Consumption rate in this case will be approximately 1.2 – 1.3 kg/m²



After at least 8 hours sand the surface with an orbit sander using 60 / 80 G sandpaper and vacuum the dust.

We recommend the use of shoe covers during all the operations to avoid dirtying the surface.

Avoid wetting the surface before completing the system, stains or spots will affect the final result.

2° COAT

Apply the second coat of **CREATIVO MONO FONDO** in the same way.

After at least 8 hours sand the surface by orbit sander using 60 / 80 G sanding discs and vacuum the dust.





SYSTEM APPLICATION

STEP 2: CREATIVO MONO FINITURA

1° COAT



Mix CREATIVO MONO FINITURA, coloured in the desired colour and apply with special tool CREATIVO RED SPATULA making sure to achieve a smooth and even surface.

Do not press too heavily with the spatula to avoid black marks.

After at least 4 hours sand the surface by orbit sander using 120G sanding disc and vacuum the dust.



2° COAT



Apply CREATIVO MONO FINITURA and design the surface with the specific technique in order to achieve the effect desired.

After at least 4 hours sand and vacuum the surface.

STEP 3: CREATIVO PRIMER



Apply one coat of CREATIVO PRIMER, ready-to-use, by roller, in order to regulate the absorbency of the following coat of protective sealer.

Wait at least 4 – 6 hours.

SYSTEM APPLICATION

STEP 4:

CREATIVO TOP A+B

1° COAT

Mix carefully COMPONENT A before use.

Add COMPONENT B (catalysis ratio: 1kg A + 0.2 kg B), mix well and apply with specific CREATIVO MOHAIR ROLLER taking care of applying homogeneously the product without leaving deposits.



Pay special attention to corners, edges and drains.

First coat can be diluted up to 10% with water.

For the 1st coat we recommend use of CREATIVO® TOP LUCIDO (glossy) to avoid roller marks



2° COAT

After at least 6 hours, and no later than 24 hours from the first coat, apply a second coat of CREATIVO TOP in the same method.

In case more than 24 hours have passed, it is necessary to sand the surface with thin grit sandpaper (250G and over) and vacuum before proceeding to the next coat.





SYSTEM APPLICATION ON WALLS

WALLS WITH NO CERAMIC TILES



When applying **CREATIVO MONO on walls without ceramic tiles**, it is possible to substitute the two coats of **CREATIVO MONO FONDO** with one coat of **SMARTCOAT 0.4 mm** applied by roller.

SMARTCOAT 0.4 MM

in 1 coat Dilute max 10% with water Waiting time: 4-6 h

Coverage: 5-8 sqm/l per coat



PROTECTION

When applying **CREATIVO MONO** on walls, it also possible to protect **CREATIVO MONO FINITURA** with :



- **One coat of CREATIVO PRIMER**, applied ready to use by roller as described above: **MEDIUM WASHABILITY**
- **One coat of CREATIVO PRIMER + 2 coats of CREATIVO MONO TOP**, ready-to-use water-based PU-sealer: **HIGH WASHABILITY and STAIN RESISTANCE**

CREATIVO MONO TOP

in 2-3 coats Ready to use Waiting time: 6 h (max 24h)

Coverage: 11-14 sqm/l per coat

CURING TIME & CLEANING



Wait at least 24 hours from the last coat before walking on the surface.

70% of the system chemical-physical performances are achieved in 3 days.

CREATIVO TOP and CREATIVO MONO TOP will be **completely dry** and cured **after 7 days**.

Full mechanical resistances are achieved after 28 days.

In the cases where there is the need for greater resistance, apply a third coat of CREATIVO TOP with double catalysis (2 components B for each Component A).

Wait at least 7 days before cleaning CREATIVO MONO for the first time.

Remove any aggressive substance from the surface as soon as possible (wine, coffee, grease, oil, etc.). Avoid prolonged contact that could deteriorate the aspect of the surface.

Clean with ordinary detergents. Do not use a steam cleaner.

CREATIVO TOP low dirt pick-up and resistance to moulds, alkaline and acid cleaning agents have been proven by the test performed to achieve the HACCP certification.






EACH SURFACE, A DEDICATED SYSTEM

01

Indoor horizontal surfaces with cement screed:

- 2 coats of CREATIVO MONO FONDO
- 2 coats of CREATIVO MONO FINITURA
- 1 coat of CREATIVO PRIMER
- 2 - 3 coats CREATIVO TOP

02



Indoor horizontal and vertical surfaces with ceramic tiles:

- 1 coat of CREATIVO GRIP
- 2 coats of CREATIVO MONO FONDO
- 2 coats of CREATIVO MONO FINITURA
- 1 coat of CREATIVO PRIMER
- 2 - 3 coats CREATIVO TOP

03

Indoor vertical surfaces without ceramic tiles:

- 1 coat of SMARTCOAT 0.4 mm
- 2 coats of CREATIVO MONO FINITURA
- 1 coat of CREATIVO PRIMER (medium washability)
- 2 coats of CREATIVO TOP or CREATIVO MONO TOP (high washability)

CREATIVO MONO is not recommended for showers, exteriors, or heavy-duty areas. Use the two-component CREATIVO MICROCEMENT system for these applications.



NB. This short guide is intended to assist you in the application of the Creativo Mono system and should be used as a quick reference only. Before starting the application, we strongly recommend reading the full Technical Data Sheet (TDS), which provide essential instructions on substrate preparation and detailed step-by-step application procedures.

KEEP IN TOUCH



We are always available to answer any question you may have on Creativo and other related products.



+39 0541 734086



mp@mp-paints.com



www.creativo-microcement.com

CREATIVO®
NEW SURFACE DESIGN